


TPLUS 400



3 - 4 - 5 m

1.45 Kg
1 mV peak 113
Ø mm 1.0 - 1.2 - 1.6
X 100% 400A CO₂
350A Mix2÷4 bar
1.6 l/min

CODE	↔	☐
MB3623	3 m	EURO
MB3624	4 m	EURO
MB3625	5 m	EURO



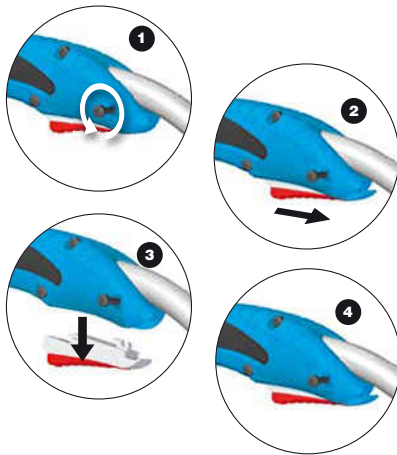


- IT** Sostituzione rapida del pulsante
- EN** Quick Trigger Replacement
- DE** Schnellwechselsystem für den Schalter
- FR** Remplacement rapide de la gâchette
- ES** Sustitucion rápida del pulsador
- TR** Kolay ve çabuk tetik değişimi.
- RU** Быстрая замена курка



EN 60974-7




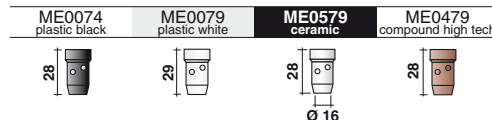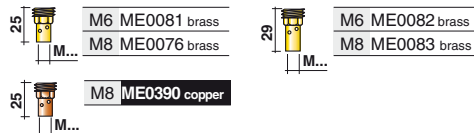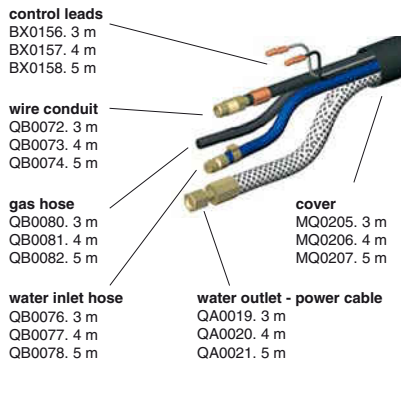

Ø	Cu	Cu-Ni	Cu for Al	CuCrZr	Triangular Cu
0,6	MD0009-06	MD0009-36		MD0009-76	
0,8	MD0009-08	MD0009-38	MD0009-58	MD0009-78	MD1009-08
0,9	MD0009-09				
1,0	MD0009-10	MD0009-40	MD0009-60	MD0009-80	MD1009-10
1,2	MD0009-12	MD0009-42	MD0009-62	MD0009-82	MD1009-12
1,4	MD0009-14	MD0009-44		MD0009-84	
1,6	MD0009-16	MD0009-46	MD0009-66	MD0009-86	

Ø	Cu	Cu-Ni	Cu for Al	CuCrZr
0,8	MD0005-08	MD0005-38	MD0005-58	MD0005-78
0,9	MD0005-09		MD0005-59	
1,0	MD0005-10	MD0005-40	MD0005-60	MD0005-80
1,2	MD0005-12	MD0005-42	MD0005-62	MD0005-82
1,4	MD0005-14	MD0005-44		MD0005-84
1,6	MD0005-16	MD0005-46	MD0005-66	MD0005-86
2,0	MD0005-20		MD0005-70	
2,4	MD0005-24		MD0005-74	

Ø	Triangular Cu	Triangular CuCrZr
1,0	MD1005-10	MD1005-80
1,2	MD1005-12	MD1005-82
1,6	MD1005-16	MD1005-86

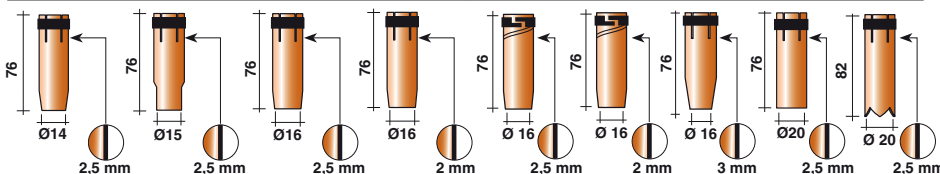

STANDARD

(REF.)

